# **Impact**

Finished Quilt Size: 60"x60"

### **General Notes:**

Read all instructions prior to starting.

WOF = Width of Fabric, assumed 40" without selvages

All seams are ¼" unless otherwise noted.

### **Fabric Requirements:**

Black Fabric - 1yd White Fabric - 3¼yd Binding - ½yd Backing - 4yd

### **Cutting Instructions:**

#### **Black Fabric**

Cut two (2) 5½"xWOF

Subcut twelve (12) 5½" squares

Cut two (2) 4½"xWOF

Subcut twelve (12) 4½" squares

Cut two (2) 3½"xWOF

Subcut sixteen (16) 3½" squares

Cut two (2) 21/2"xWOF

Subcut thirty-two (32) 2½" squares

Cut two (2) 1½"xWOF

Subcut twenty-eight (28) 1½" squares

#### White Fabric

Cut four (4) 1"xWOF

Subcut twenty-four (24) 1"x5%" rectangles

Cut three (3) 11/2"xWOF

Subcut twenty-four (24) 1½"x4½" rectangles

Cut four (4) 2"xWOF

Subcut thirty-two (32) 2"x3½" rectangles

Cut four (4) 2½"xWOF

Subcut sixty-four (64) 2½" squares

Cut three (3) 3"xWOF

Subcut fifty-six (56) 3"x1½" rectangles

Cut twelve (12) 6½"xWOF

Subcut twenty-four (24) 1"x6½" rectangles

Subcut twenty-four (24) 1½"x6½" rectangles


Subcut thirty-two (32) 2"x61/2" rectangles

Subcut sixty-four (64) 2½"x6½" rectangles

Subcut fifty-six (56) 3"x6½" rectangles

#### **Binding Fabric**

Cut seven (7) 2½"xWOF

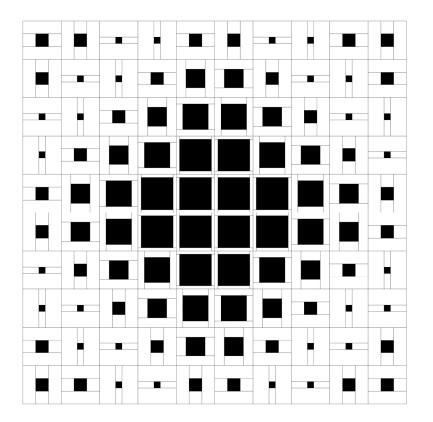


# **Sewing Instructions:**

### **Unit Construction**


- Use the chart below for the sizes of each piece for the Unit.
- Sew a Size A White Fabric on either Side of the Black Center. Press seams to the Black Fabric.



• Sew a Size B White Fabric on the Top and Bottom of the unit made above. Press seams to the to the center.




	Unit 1	Unit 2	Unit 3	Unit 4	Unit 5
	Make 12	Make 12	Make 16	Make 32	Make 28
Black Center	5½" square	4½" square	3½" square	2½" square	1½" square
Size A White Fabric	1"x5½"	1½"x4½"	2"x3½"	2½"x2½"	3"x1½"
Size B White Fabric	1"x6½"	1½"x6½"	2"x6½"	2½"x6½"	3"x6½"

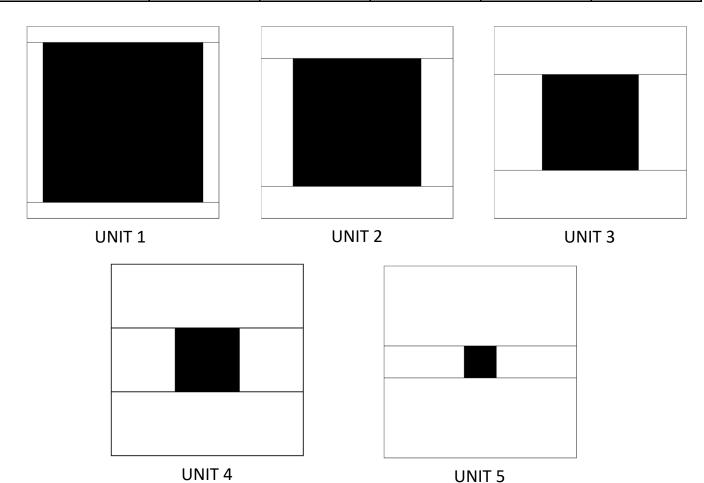

## **Quilt Top Assembly:**


- Lay out the entire quilt top. Rotate every other piece 90 degrees to avoid clashing seams
- Sew the blocks together in a row, pressing the seams in alternating directions with each row.
- Sew each row together to complete the quilt, then press the seams towards the bottom of the quilt.
- Baste and quilt as desired. Trim the excess batting and backing to size.

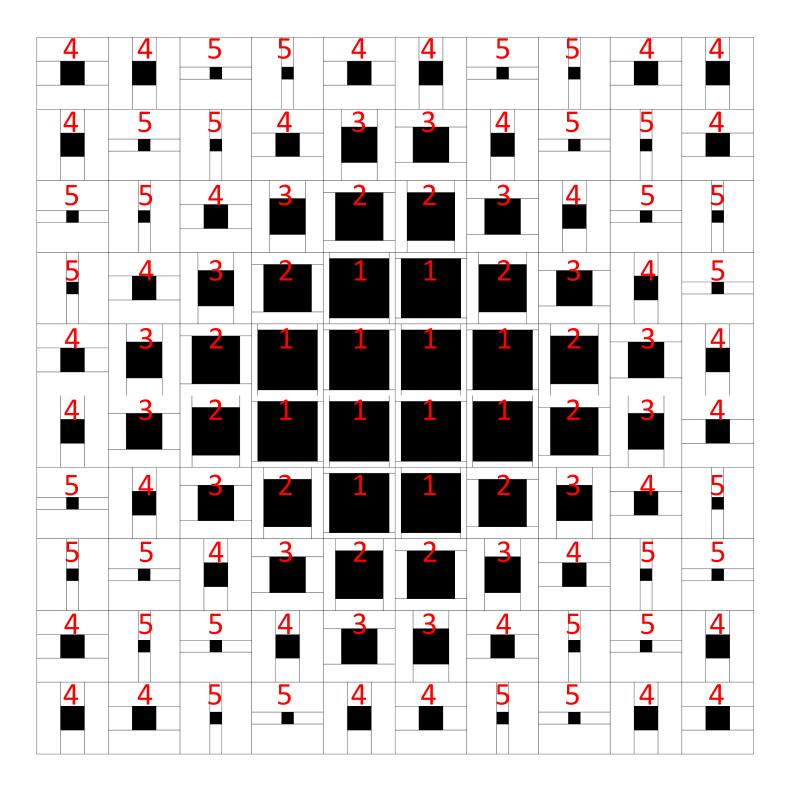

### **Binding the Quilt:**

Sew the binding strips together with a diagonal seam to make one long  $2\frac{1}{2}$ " strip. Press the strip in half lengthwise.

Starting in the middle of one of the sides of the quilt, leave 8-10 inches of the binding that is not stitched down. Stitch the binding to the quilt with the raw edge aligned with the edge of the quilt. When you get to a corner, stop ¼" from the end and sew diagonally to the corner. Remove the quilt from the machine. Fold the binding up at a 45 degree angle so it's perpendicular to the quilt. Hold the binding and fold the binding back in line with the edge the quilt. Start stitching at the top of the binding fold and continue to the next corner.

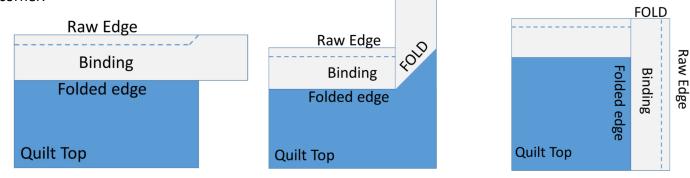

Stop stitching the binding 6" from where you started. Measure the binding, sew the ends together, and trim. Press the seams open, then finish stitching the binding on the quilt.

After the binding is stitched on the quilt, bring the folded edge around the back of the quilt, miter the corners, and hand stitch in place.

Enjoy your quilt! Share your finished product on social media with #PBQImpact